

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/001063

International filing date: 22 March 2005 (22.03.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0407643.6
Filing date: 02 April 2004 (02.04.2004)

Date of receipt at the International Bureau: 21 April 2005 (21.04.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

BEST AVAILABLE COPY



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



Signed

Dated 13 April 2005





**The
Patent
Office**

05APR04 E886363-3 D00113
P01/7700 0.00-0407643.6 ACCOUNT CHA

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference	87136/13159/03		
2. Patent application number <i>(The Patent office will fill this part in)</i>	0407643.6		- 2 APR 2004
3. Full name, address and postcode of the or of each applicant <i>(underline all surnames)</i>	EASTMAN KODAK COMPANY 343 STATE STREET ROCHESTER NEW YORK 14650-2201 UNITED STATES OF AMERICA 423020001		
Patents ADP number <i>(if you know it)</i>			
If the applicant is a corporate body, give the country/state of its incorporation	NEW JERSEY		
4. Title of the invention	DISPLAY ELEMENT		
5. Name of your agent <i>(if you have one)</i>	B BARKER		
"Address for service" in the United Kingdom to which all correspondence should be sent <i>(including the postcode)</i>	KODAK LIMITED PATENTS, W92-3A HEADSTONE DRIVE HARROW MIDDLESEX HA1 4TY 1024001		
Patents ADP number <i>(if you know it)</i>			
6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.	Country	Priority application number <i>(if you know it)</i>	Date of Filing <i>(day / month / year)</i>
7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f)	Number of earlier UK application		Date of filing <i>(day / month / year)</i>
8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request? Answer YES if:	YES		
a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. Otherwise answer NO (See note (d))			

Patents Form 1/77

9. Accompanying documents: A patent application must include a description of the invention.

Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form

Description 9

Claim(s) 3

Abstract 1

Drawing(s) 5 + 5

10. If you are also filing any of the following, state how many against each item.

Priority Documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patent Form 9/77)

Request for substantive examination (Patent Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

B Barker

Date 2 APRIL 2004

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom

B BARKER 020 8424 5177
brenda.barker@kodak.com

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6), or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.

Display Element

Field of the Invention

This invention relates to the field of display elements, in particular to the
5 field of passive display elements.

Background of the Invention

Many companies are actively seeking to create a display element that is
easily manufacturable using roll-to-roll coating techniques. These display
10 elements can be either active, i.e. emit light such as LED, OLED, PLED, EL, or
passive, i.e. affect the passage, reflection or refraction of light such as LCD, CLC,
e-ink etc.. Some passive systems are bistable such they can be switched and
remain switched after the power has been removed. Most configurations
previously disclosed can be readily adapted to colour functionality.

15 Various electrowetting display elements are known in the prior art.

US6473492 discloses a fluid element device that rearranges fluid within a
capillary tube. A voltage is used to move the fluid within the capillary to a
desired level. US2002/0080920 discloses a filter device using an array of
elements based upon US6473492 for use with X-ray imaging equipment.
20 US2003/0085850 discloses an electrostatic device that changes a meniscus shape
such that the focal length of the device changes.

US6449081 describes a focussing element based on the electrowetting
phenomenon. WO2/002099527 describes a display element with a defined
prismatic structure that contains two immiscible fluids together with electrodes
25 such that the fluid can be rearranged with the cell.

Problem to be solved by the Invention

In display elements based on the rearrangement of liquid it is of benefit to
ensure the liquid is captured by capillary forces. This is achieved by making the
30 elements small. Thus the existing art does not easily address the requirement for
large pixel areas. Furthermore, the existing art describes structures that

necessarily require micro-fabrication and thus relatively complex construction methods not transferable to roll-to-roll manufacture.

It is the purpose of the current invention to provide a new device based on a combination of mechanisms that has previously not been contemplated. This
5 class of device will be adaptable to colour use though the description below is for a single colour element. The display element is capacitative in nature and thus has low power consumption and is switched by low voltages. The element modifies the reflectivity of the surface thereof.

10 **Summary of the Invention**

According to the present invention there is provided a display element comprising at least two porous layers, a conductive liquid residing in the upper layer, the liquid having a contact angle with the material of the upper layer of less
15 than about 60° , the material of the lower layer being conductive and insulated from the liquid with a dielectric covering, the liquid having a contact angle with the material of the lower layer of greater than about 90° , whereby on application of a voltage between the lower layer and the liquid the liquid moves out of the upper layer into the lower layer thereby effecting an optical change in the upper layer.

20 The invention further provides a display device comprising at least one element as described above including means for connection of each element to a circuit to create a matrix display.

Advantageous Effect of the Invention

25 The present invention is simple to manufacture over large areas because of the stochastic structure of the elements and may be manufactured via roll-to-roll techniques. It fulfils the requirement of capturing small liquid elements by capillarity. However the switching time of the element is not limited by its area. It is also simple to address and drive, via suitably patterned passive or active
30 matrix type backplanes.

Brief Description of the Drawings

The invention will now be described with reference to the accompanying drawings in which:

Figure 1 is a schematic view of an element according to the present invention;

5 Figure 2 shows the element both in an "on" state and an "off" state;

Figure 3 illustrates a core shell arrangement of particles within the element;

Figure 4 illustrates a different core shell arrangement of particles within the element;

10 Figure 5 is a schematic view of a second element in accordance with the present invention; and

Figure 6 is a schematic view of the element including an intermediate layer.

15 **Detailed Description of the Invention**

Figure 1 is a schematic view of a display element according to the invention. The invention relates to a passive display element.

Throughout the description and claims the term "upper" defines the side from which an element would be viewed. The term "lower" defines the side
20 opposite the upper side. The terms upper and lower are not to be taken as limiting the orientation of the element according to the invention.

The element is based upon a two layer porous system. In the embodiment shown in Figure 1 the upper layer 2 and lower layer 4 are sandwiched between an upper conductor 12 and a lower conductor 14. The upper conductor 12 should be
25 transparent. The conductor may equally be formed of, for example, wire filaments in which case the material does not have to be transparent. It will be understood by those skilled in the art that it is not necessary for the conductors to be at the top and bottom of the element. What is required is that a voltage can be applied to a liquid 10. The conductors may be at the side of the element or at any
30 other suitable location. An insulating layer 16 is located between the lower layer 4 and the lower conductor 14. The element is encapsulated by an upper substrate

26 and a lower substrate 28. The substrates should be insulating and impermeable to liquid. The upper substrate must be of a transparent material.

The upper layer 2 comprises a plurality of particles 6, such as silica. It will be understood by those skilled in the art that silica is only an example of the material which can be used. Any other lyophilic material may be used that can be matched with the refractive index of the liquid used. The particle sizes would be in the order of 30nm to 2 microns.

A liquid 10 resides in the pore space of the upper layer 2. The liquid may be water but it will be understood by those skilled in the art that it is not essential that the liquid is water. However the liquid must be conductive. The conductive liquid may be created by adding ions to a solvent. Alternatively the conductive liquid may be an ionic liquid.

The refractive index of the particles 6 in the upper layer 2 should be substantially the same as the refractive index of the liquid 10. The size of the particles 6 should be a substantial fraction of the wavelength of light, e.g. 200nm. As the refractive index of the liquid is substantially similar to that of the particles the upper layer will effectively be invisible. What will be seen is the colour of the lower layer 4.

The lower layer 4 comprises a plurality of particles 8. The particles 8 should be of similar size or smaller than the particles 6 in the upper layer 2. The particles may be coloured to provide a coloured pixel or they may be black to provide a black pixel. Alternatively an intermediate layer 30 of coloured or black particles may be provided between the upper layer 2 and the lower layer 4. Such an embodiment is shown in Figure 6. The particles of this intermediate layer have substantially the same properties, in terms of contact angle with liquid 10, size, shape etc as the particles of the upper layer 2 with the exception that they are coloured. If such an intermediate layer is used it does not matter what colour the particles of the lower layer are as they will not be seen. A further option would be to use a coloured liquid 10.

The liquid 10 has a contact angle greater than 90° with the particles 8. The particles 8 are conductive. The particles may be solid metal particles or only the shell thereof may be conductive. If the particles have a shell the thickness of the

shell can be chosen to create a particular coloured particle. An explanation of this can be found in Seed-mediated Growth Techniques for the Preparation of a Silver Nanoshell on a Silica Sphere, Zhong-jie Jiang and Chun-yan Liu, J. Phys. Chem B. 2003, 107, 12411-12415. Whichever type of particle is used they should be

5 covered with an electrically insulating thin layer or covering 24 of a lyophobic material with low contact angle hysteresis. Suitable particles would be conductive silver particles encased with lyophobic and dielectric mercaptan. It will be understood by those skilled in the art that this is an example only and any conductive material and lyophobic covering could be used within the terms of the

10 invention. Figures 3 and 4 illustrate possible core shell arrangements of the particles. The core 20 may be a cheap insulating particle such as silica. A metal shell 22 encapsulates each core 20. The layer of lyophobic material 24 surrounds the shelled particles. The layer 24 may be made of, for example, polymer. Other materials which may be used include a polyelectrolyte, a fluoropolymer, a self

15 assembled monolayer (SAM) or an inorganic shell. However the invention is not to be taken as limited to these materials. For DC operation the metal cores 20 of the particles 8 in the lower layer 4 should be connected and the lyophobic electrically insulating covering 24 completely encapsulate the structure. For DC operation all particle cores of layer 4 need to be connected to the conductor 14.

20 For AC operation the particles can be individually encapsulated with lyophobic and electrically insulating shells. The structure illustrated in Figure 3 will work with both AC and DC operation

The liquid 10 has a high advancing contact angle with the particles 8 of the lower layer. Therefore the capillary pressure is such that no liquid 10 will enter

25 the lower layer from the upper layer. The liquid will remain in the upper layer 2 since the lower layer 4 is lyophobic. Thus, with no voltage applied between the conductors 12, 14, and the liquid the liquid 10 resides in the upper layer 2. As the liquid 10 and the particles 6 have a similar refractive index the upper layer will appear essentially transparent or translucent. The particles 8 of the lower layer 4

30 scatter the light. Therefore the colour of the particles in the lower layer can be seen. In the embodiment of the invention including an intermediate layer, see Figure 6, the colour of the particles forming the intermediate layer will be seen.

On application of a voltage between the liquid and the conductors 12, 14 an effect called "electrowetting" takes effect. Electrowetting is explained in Blake et al, Langmuir 2000, 16, 2928-2935. The voltage applied is in the order of 1 volt, a maximum of 20V being envisaged.

5 The applied voltage causes an electrowetting effect which reduces the contact angle of the liquid 10 with the lower layer 4. The usual electrowetting equation may be used

$$\cos(\theta) = \cos(\theta_0) + \frac{\epsilon\epsilon_0 V^2}{2d\gamma}$$

10 Where θ is the contact angle in the presence of a voltage, θ_0 is the contact angle with no voltage, V is the voltage, ϵ is the dielectric constant of the lyophobic layer, ϵ_0 is the permittivity of free space, γ is the liquid surface tension and d is the thickness of the lyophobic layer. The capillary pressure, ΔP , within the pore system can be defined as

$$\Delta P = \frac{\gamma \cos(\theta)}{a}$$

15 Where a is the average pore radius within the porous structure. If we define the upper layer as A and the lower layer as B , then

liquid moves from the upper to lower layer if $\Delta P_A < \Delta P_B$

20 and moves from the lower to upper layer if $\Delta P_A > \Delta P_B$

For a lyophobic bottom layer and lyophilic top layer and with $V=0$, ΔP_A is positive and ΔP_B is negative. The capillary pressure is therefore unfavourable for the liquid 10 to move into the lower layer 4. When sufficient voltage is applied, ΔP_B increases until it is greater than ΔP_A at which point the liquid 10 will move into the lower layer 4. The upper layer 2, now largely empty of liquid 10, will strongly scatter light and appear white. On subsequent removal of the voltage, ΔP_B will fall and, provided it falls below that of the upper layer 2, the liquid 10 will be drawn back into the upper layer. Note that it is important that the upper

layer never completely empties, though the system is self-limiting on application of the voltage such that this cannot easily happen.

A second embodiment of the present invention is illustrated in Figure 5. In this embodiment the upper layer 2 is a photonic crystal, for example, opal or
5 inverse opal, structure 18 rather than a random porous structure. The photonic crystal structure is very regular and the particle sizes are in the order of the wavelength of light. The crystal structure acts as a diffraction grating and reflects only particular wavelengths of light, i.e. particular colours. When the gaps in the crystal structure are filled with liquid 10, the photonic nature of the layer 2 is
10 removed and the layer becomes transparent or translucent as described above. Colour from the lower layer 4 is then seen: However when the liquid 10 is drained from the upper layer 2, in the same way as described above, the photonic layer reflects strongly at a wavelength defined by the symmetry and spacing dimension of the crystal structure. Thus the upper layer 2 now reflects a colour
15 defined by the size of the photonic crystals. Thus a coloured element could be made.

The following working example demonstrates the principle of the invention.

A base electrode, lower conductor, was formed by an indium tin oxide
20 (ITO) coating on a poly-ethylene-teraphthalate (PET) base. This was used as supplied and cut into appropriately sized pieces. The ITO layer faced upwards and provided a conductive surface onto which the porous display device could be built.

The ITO base was dip coated (3-4 layers) with a fluoropolymer (Fluoropel
25 804A, sourced from Cytonix Corporation), which behaved as a hydrophobic dielectric layer. The thickness of the layer was approximately $3\mu\text{m}$.

The lower porous layer contained 200nm diameter silver particles, which were coated in a layer of octadecyl mercaptan. The silver particles were precipitated on the reduction of silver nitrate with sodium borohydride. The
30 octadecyl mercaptan was added immediately after precipitation. The octadecyl mercaptan gave a hydrophobic and electrically insulating coating to the silver particles.

The resulting coating showed a step change in capacitance with voltage (at 2V AC peak-peak) when the capacitance was measured with a droplet of 20g/l NaCl solution placed on the surface. This indicated that the drop was being pulled reversibly in and out of the lower porous network.

5 An upper porous layer was coated on top of the mercaptan coated silver particles. The particles in the upper layer are polystyrene beads which were coated with colloidal silica particles. See US 5455320 and US 5750328. The particles were 650nm diameter. The upper layer was coated from an aqueous system prepared with about 25% solids, 0.1% Zonyl FSN and 1.0% gelatin.

10 The refractive index of the upper layer of particles was higher than that of water. So in order to increase the refractive index, 80% glycerol solution (20g/l NaCl) was used as the liquid in the device. A switching system was demonstrated. The upper layer of particles was fully wetted with the liquid and any excess liquid removed. At this stage the device had a grey appearance. A
15 needle was then placed onto the upper surface and was in turn connected to the AC power supply. When an AC voltage was applied to the system the area surrounding the tip of the needle turned white. This indicated that the liquid in this area had been drawn down into the lower level and the device had switched. When the applied voltage was removed the area turned back to its original grey
20 colour.

 The elements can be made using coating technology. Initially a substrate comprising a pattern of electrodes is prepared by means such as printing. Subsequently a coating process, either multiple single layer coatings or one or more multi-layer coatings is used to lay down the porous layers. The coating
25 process chosen can be unmetered or preferably pre-metered. It is well known in the coating art to manufacture porous particulate layers through single or multi-layer coating processes. The layers will then be dried. The liquid 10 can then be coated and since the top layer is lyophilic, the liquid will fill the upper layer without penetrating the lower layer. A final encapsulating layer is then provided
30 by coating or by lamination and will contain electrodes to connect to the liquid layer.

A matrix or plurality of elements can be assembled to form a display device.

The elements of the display device would be environmentally sealed in order to encapsulate the liquid and prevent moisture ingression and liquid loss.

5 The invention has been described in detail with reference to preferred embodiments thereof. It will be understood by those skilled in the art that variations and modifications can be effected within the scope of the invention.

Claims:

1. A display element comprising at least two porous layers, a conductive liquid residing in the upper layer, the liquid having a contact angle with the material of the upper layer of less than about 60°, the material of the lower layer being conductive and insulated from the liquid with a dielectric covering, the liquid having a contact angle with the material of the lower layer of greater than about 90°, whereby on application of a voltage between the lower layer and the liquid the liquid moves out of the upper layer into the lower layer thereby effecting an optical change in the upper layer.
2. An element as claimed in claim 1 wherein the upper layer comprises a plurality of particles.
3. An element as claimed in claim 1 or 2 wherein the lower layer comprises a plurality of conductive particles covered with a dielectric layer.
4. An element as claimed in claim 3 wherein the conductive particles are metallic.
5. An element as claimed in claim 3 wherein the conductive particles are organic or inorganic particles covered with a conductive shell.
6. An element as claimed in claim 5 wherein the thickness of the conductive shell is chosen to create a coloured particle.
7. An element as claimed in any preceding claim wherein the dielectric covering is a polymer, a polyelectrolyte, a fluoropolymer, a self assembled monolayer (SAM) or an inorganic shell.
8. An element as claimed in claim 7 wherein the SAM comprises a molecule with a group that bonds to the conductive particles and a group that provides a high contact angle with the liquid.

9. An element as claimed in any preceding claim wherein an intermediate layer of coloured material is provided between the upper layer and the lower layer.
- 5
10. An element as claimed in claim 9 wherein the material of the intermediate layer comprises a plurality of particles providing an average pore size substantially the same as that of the upper layer, the liquid having a contact angle with the plurality of particles of less than about 60°.
- 10
11. An element as claimed in any preceding claim wherein each layer has a pore size greater than about 30 nm and less than about 2µm.
12. An element as claimed in any preceding claim wherein the
- 15 conductive liquid and the material of the upper layer have substantially the same refractive index.
13. An element as claimed in any preceding claim wherein the conductive liquid is created by adding ions to a solvent.
- 20
14. An element as claimed in any of claims 1 to 12 wherein the conductive liquid is an ionic liquid.
15. An element as claimed in any preceding claim wherein the
- 25 conductive liquid contains a dye or pigment to provide a coloured liquid.
16. An element as claimed in any preceding claim wherein the upper layer comprises a photonic crystal structure.
- 30
17. A device comprising at least one element as claimed in any preceding claim including means for connection of each element to a circuit to create a matrix display.

18. A device comprising at least one element as claimed in any preceding claim, the materials of each layer being coated onto a support material.

5 19. A device as claimed in claim 18 wherein each element is environmentally sealed.

Abstract

Display Element

A display element comprises at least two porous layers, one layer being conductive, and a conductive liquid. Application of a voltage to the element
5 causes movement of the liquid. Movement of the liquid causes an optical change in the upper layer of the element.

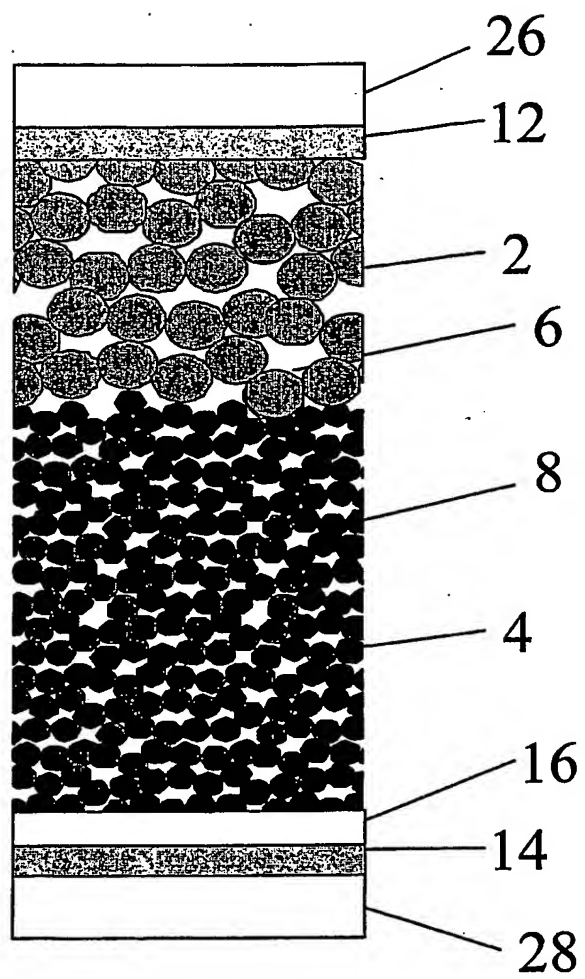


Fig. 1

2/5

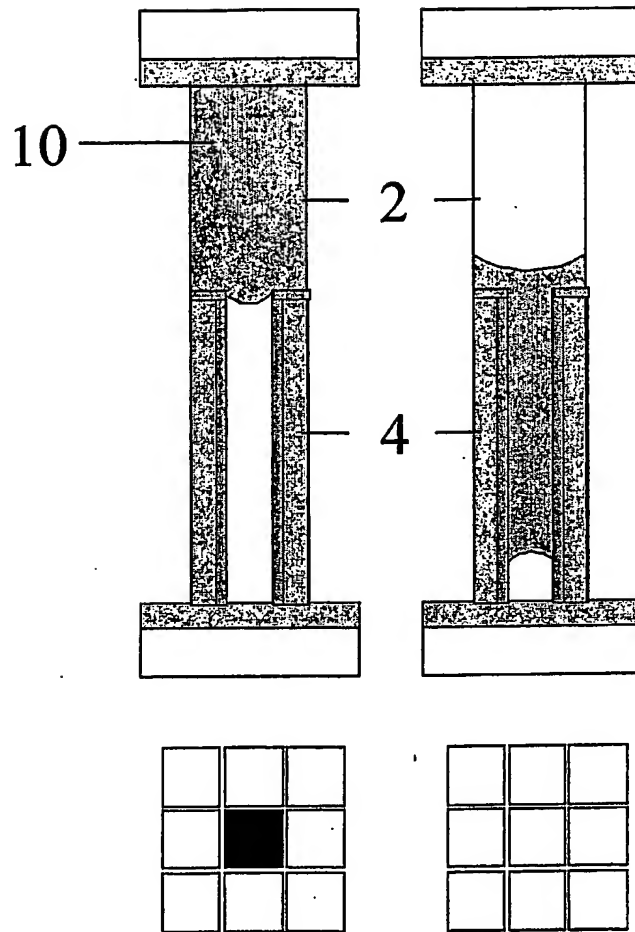


Fig. 2



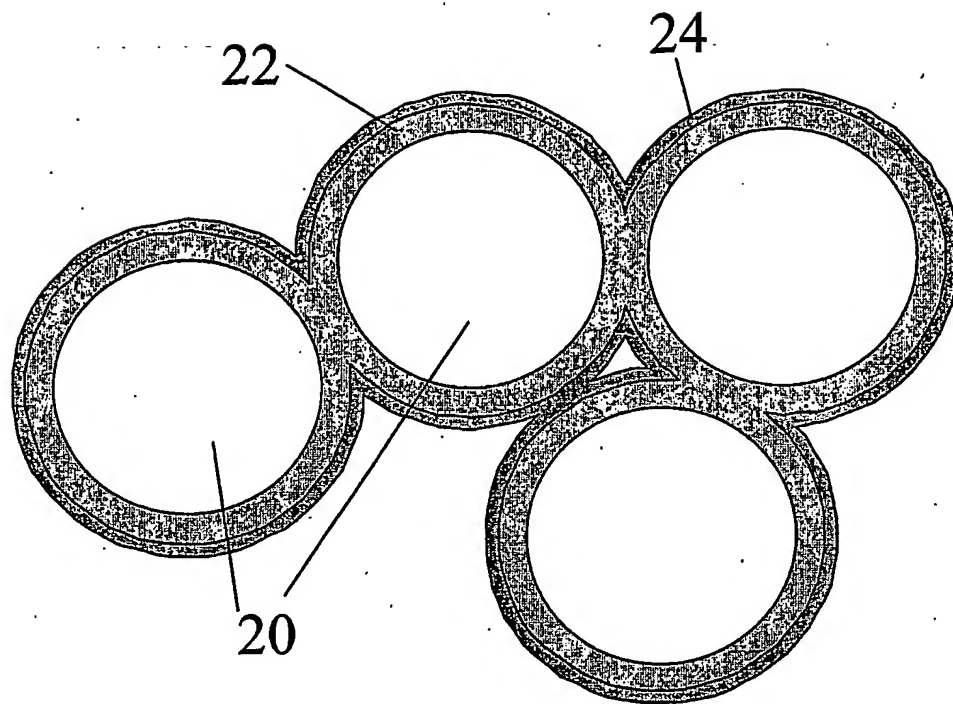


Fig. 3

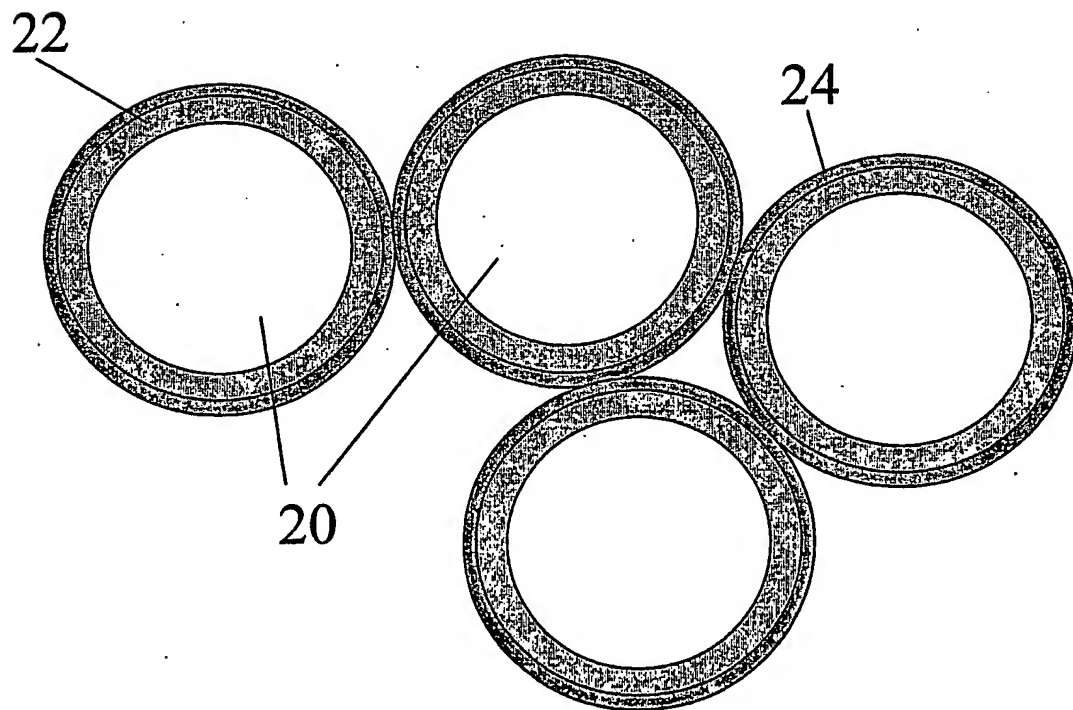


Fig. 4

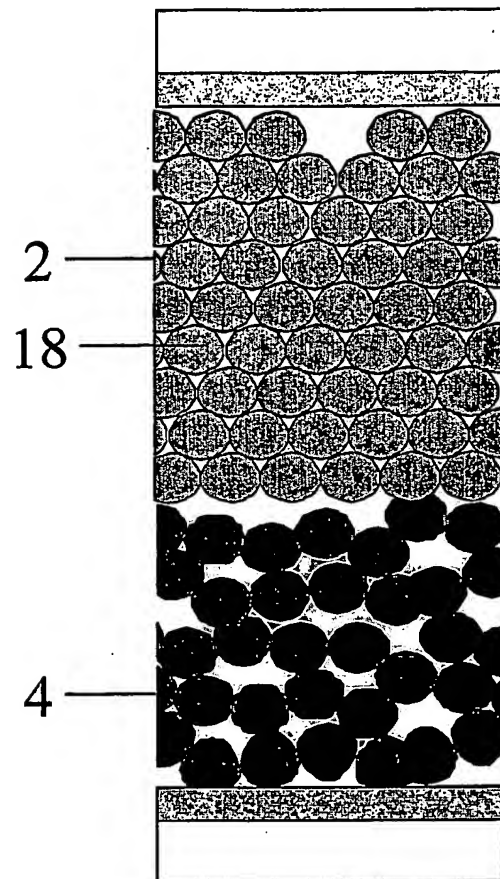


Fig. 5



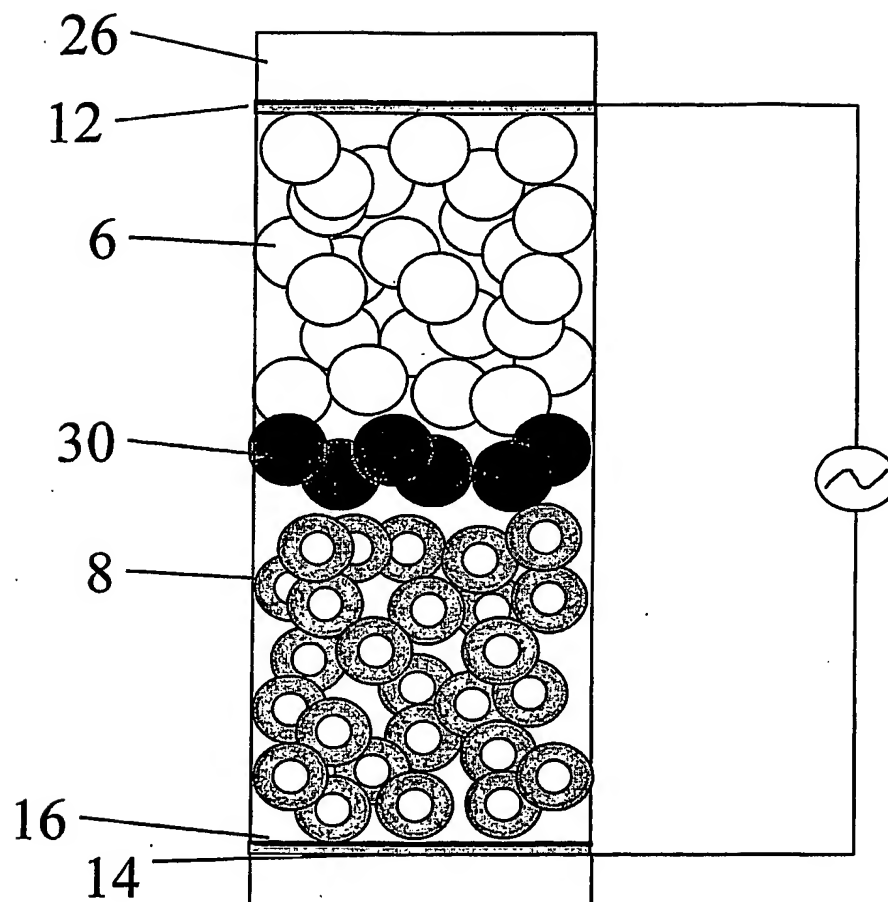


Fig. 6

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.